


ALTO 3 - 2-piece-set - 20 bar Filter-Regulator-Lubricator (gauge included) with wall bracket



<p><u>BSPF female thread</u> G 1/2</p>	<p><u>Flow rate (l/min at 7 bar ΔP)</u> 1 bar) = 3000</p>	<p><u>Operating pressure (bar)</u> Inlet: 20 Outlet: 0.5-12.5</p>	<p><u>Filtration (μm)</u> 40</p>
<p><u>Temperature</u> +5°C to +50 °C</p>	<p><u>Construction</u> Body : Aluminium Polycarbonate bowl with metallic protection</p>	<p><u>Equipped with</u> Manual drain</p>	

Description				
Reference	BSPF female thread	Flow rate (l/min at 7 bar ΔP)	Operating pressure (bar)	Filtration (μm)

TB HPSM3	G 1/2	1bar) = 3000	Inlet: 20 Outlet: 0.5- 12.5	40
----------	-------	--------------	--------------------------------	----

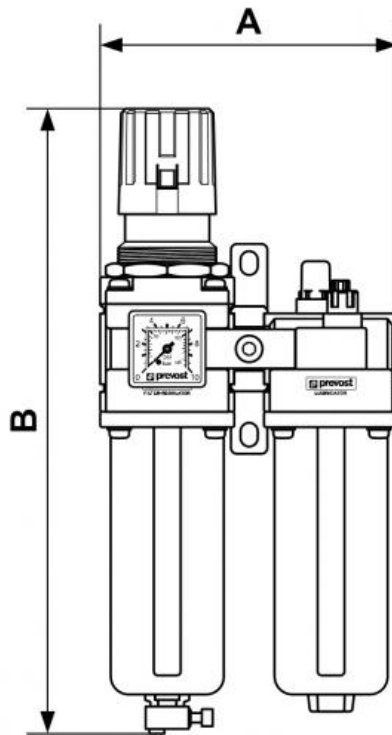

Dimensions

Reference	A mm	B mm
TB HPSM3	156	330