

## ALTO 3 - HP Regulator with gauge



### BSPF female thread

G 1/2

### Flow rate (l/min at 7 bar ΔP : 1bar)

4000

### Operating pressure (bar)

Inlet: 20 Outlet: 0.5-12.5

### Temperature

+5°C to +50 °C

### Construction

Body : Aluminium


Polycarbonate bowl with metallic protection

### Equipped with

Manual drain

## Description

Reference	BSPF female thread	Flow rate (l/min at 7 bar ΔP : 1bar)	Operating pressure (bar)
<b>TR HPM3</b>	G 1/2	4000	Inlet: 20 Outlet: 0.5-12.5

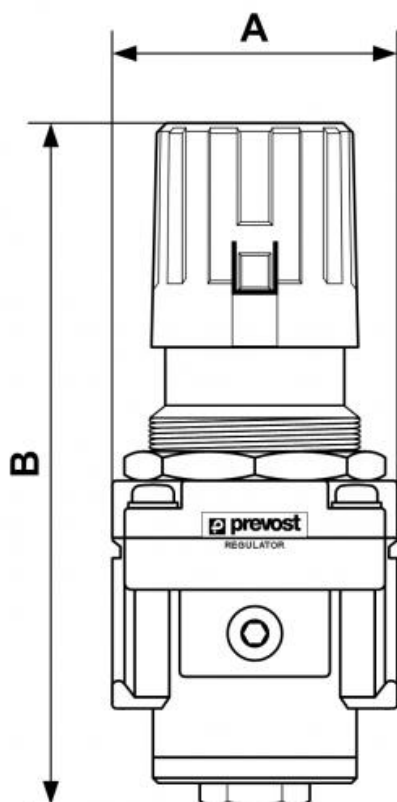

### Dimensions

Reference	A mm	B mm
<b>TR HPM3</b>	71	160