

ALTO 3 - HP Regulator with gauge



BSPF female thread

G 1/2

Flow rate (l/min at 7 bar ΔP : 1bar)

4000

Operating pressure (bar)

Inlet: 20 Outlet: 0.5-12.5

Temperature

+5°C to +50 °C

Construction

Body : Aluminium


Polycarbonate bowl with metallic protection

Equipped with

Manual drain

Description

Reference	BSPF female thread	Flow rate (l/min at 7 bar ΔP : 1bar)	Operating pressure (bar)
TR HPM3	G 1/2	4000	Inlet: 20 Outlet: 0.5-12.5

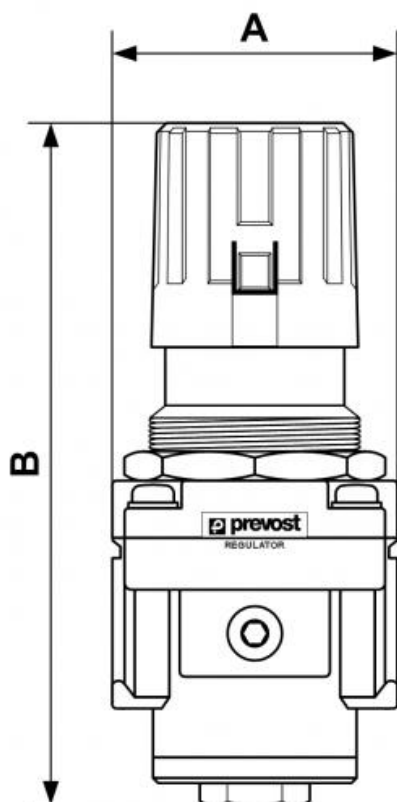

Dimensions

Reference	A mm	B mm
TR HPM3	71	160