

ALTO 4 - Filter-regulator



BSPP female thread

G 3/4

Flow rate (l/min at 7 bar ΔP : 1bar)

4250

Operating pressure (bar)

Inlet: 12 Outlet: 0.5-10

Filtration (µm)

25

Temperature

+5°C to +50 °C

Construction

Body : Aluminium

Polycarbonate bowl with metallic protection


Equipped with

Manual drain

Description

Reference	BSPP female thread	Flow rate (l/min at 7 bar ΔP : 1bar)	Operating pressure (bar)	Filtration (µm)
-----------	--------------------	--------------------------------------	--------------------------	-----------------

TM 4	G 3/4	4250	Inlet: 12 Outlet: 0.5-10	25
TM 5	G 1	5500	Inlet: 12 Outlet: 0.5-10	25

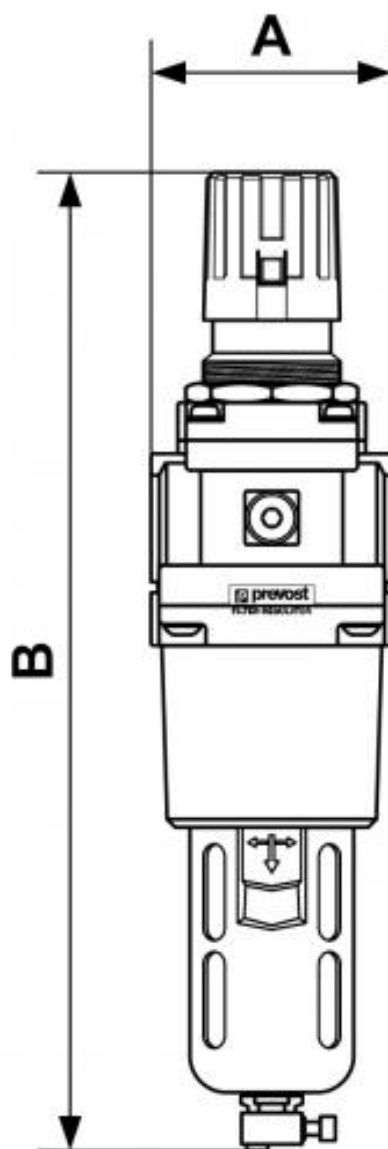

Dimensions

Reference	A mm	B mm
TM 4	90	370
TM 5	90	370