

DGO series - Large - Rubber hose



ID/OD (mm)

10 x 17

Length (m)

25

Coupler

ESI 07

Flow rate (l/min)

500

Swivel inlet (BSPP)

G 3/8 F

Weight (kg)

26

Technology

Pipe locked with ratchet
stop

Max operating

pressure

12 bar

Construction

Epoxy-coated steel case

Connection


1 m of inlet supply hose

Equipped with

Fixed bracket

Description

Reference	ID/OD (mm)	Length (m)	Coupler	Flow rate (l/min)	Swivel inlet (BSPF)	Weight (kg)
DGO 1025ES	10 x 17	25	ESI 07	500	G 3/8 F	26
DGO 1320ES	13 x 20	20	ESI 07	1000	G 1/2 M	27
DGO 1610ES	16 x 23	10	ESI 11EB	3000	G 1/2 M	27
DGO 1025IS	10 x 17	25	ISI 06	500	G 3/8 F	26
DGO 1320IS	13 x 20	20	ISI 08	1000	G 1/2 M	27
DGO 1610IS	16 x 23	10	ISI 11EB	3000	G 1/2 M	25
DGO 1025CS	10 x 17	25	CSI 06	500	G 3/8 F	26
DGO 1320CS	13 x 20	20	CSI 08	1000	G 1/2 M	27

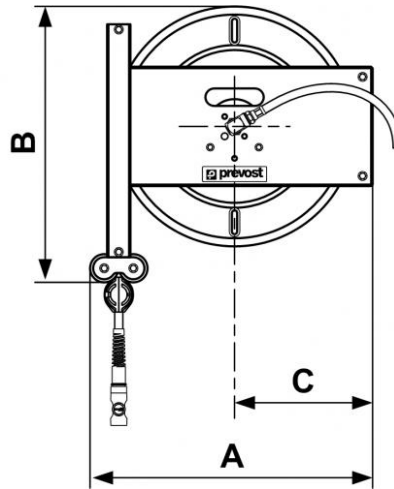

Dimensions

Reference	A mm	B mm	C mm
DGO 1025ES	485	475	237
DGO 1320ES	485	475	237
DGO 1610ES	485	475	237
DGO 1025IS	485	475	237
DGO 1320IS	485	475	237
DGO 1610IS	485	475	237
DGO 1025CS	485	475	237
DGO 1320CS	485	475	237