


## Automatic Drain Thread BSP



<u>Outlet Ø (mm)</u> -	<u>Removal capacity (l/h)</u> -	<u>Operating pressure (bar)</u> -	<u>Protection rating</u> -
<u>Supply voltage</u> -	<u>Temperature</u> -	<u>Description</u> Repair kit for PDE 100 automatic drain	<u>Operating pressure</u> 0 to 16 bar
<u>ID Passage</u> 4,5 mm	<u>Temperature</u> +2°C to +55°C	<u>Drain cycle</u> 0,5 - 45 min	<u>Drain opening</u> 0,5 - 10 sec
<u>Supply voltage</u> 24 - 220 V 50/60 HZ			

### Description

Reference	Outlet Ø (mm)	Removal capacity (l/h)	Operating pressure (bar)	Protection rating	Supply voltage	Temperature	Inlet BSPT male thread	Description
<b>PDE 100</b>	8	5	0.2 to 16	IP 65	230 V AC	+1°C to +60°C	R 1/2	Repair kit for PDE 100 automatic drain
<b>PDE 100KR</b>	-	-	-	-	-	-		

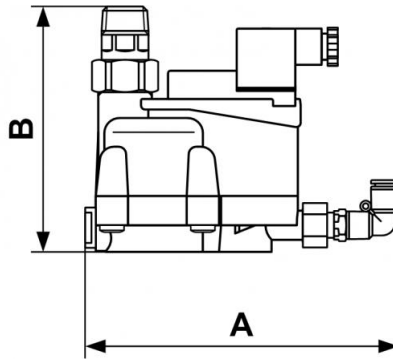

### Dimensions

Reference	A mm	B mm
<b>PDE 100</b>	155.2	121.9
<b>PDE 100KR</b>		