

## Male thread coupler



**BSPM male thread**

G 1/2

**NPT male thread**

-

**Technology**

"One push" safety system  
(avoids hose whip)

**Operating pressure**

2 to 12 bar

**Flow rate at 6 bar**

833 l/min ( $\Delta P = 0,6$  bar)

**ID Passage**

6 mm

**Temperature**

-15°C to +70°C

**Construction**

Composite body


**Highlight**

Anti-static Non scratch

### Description

Reference	BSPM male thread	NPT male thread
<b>USI 061153</b>	G 1/2	-
<b>USI 061152</b>	G 3/8	-
<b>USI 061151</b>	G 1/4	-

Reference	BSPB male thread	NPT male thread
<b>USI 061251</b>		1/4" MNPT
<b>USI 061252</b>		3/8" MNPT
<b>USI 061253</b>		1/2" MNPT

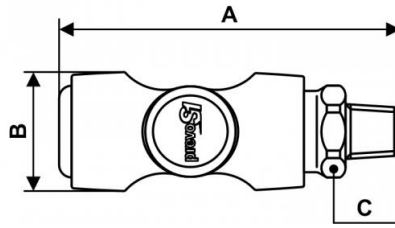

### Dimensions

Reference	A mm	B mm	C mm
<b>USI 061153</b>	88	30	23
<b>USI 061152</b>	82	30	20
<b>USI 061151</b>	82	30	20
<b>USI 061251</b>	82	30	20
<b>USI 061252</b>	82	30	20
<b>USI 061253</b>	88	30	23