

Male thread coupler



BSPB male thread

G 1/2

NPT male thread

-

Technology

"One push" safety system
(avoids hose whip)

Operating pressure

2 to 12 bar

Flow rate at 6 bar

2028 l/min ($\Delta P = 0,6$ bar)

ID Passage

8 mm

Temperature

-15°C to +70°C

Construction

Composite body


Highlight

Anti-static Non scratch

Description

Reference	BSPB male thread	NPT male thread
USI 081153	G 1/2	-
USI 081152	G 3/8	-
USI 081151	G 1/4	-

Reference	BSPB male thread	NPT male thread
USI 081251		1/4" MNPT
USI 081252		3/8" MNPT
USI 081253		1/2" MNPT

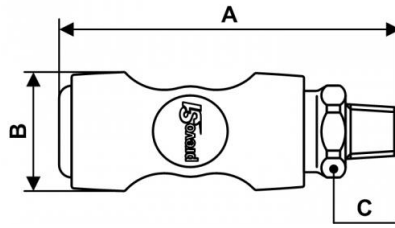

Dimensions

Reference	A mm	B mm	C mm
USI 081153	98.4	33	23
USI 081152	94.4	33	23
USI 081151	94.4	33	23
USI 081251	94.4	33	23
USI 081252	94.4	33	23
USI 081253	98.4	33	23