


ISO B-Series hydraulic coupler



<u>BSPF female thread</u> G 1/4	<u>Nominal Ø (mm)</u> 6	<u>Flow rate (nominal in l/min)</u> 12	<u>Max operating pressure (bar)</u> 250
<u>Profile</u> ISO B	<u>Technology</u> Ball lock	<u>Temperature</u> -25°C to +100°C	<u>Construction</u> Body: steel
<u>Applications</u> Industry	<u>Connection</u> Semi-automatic		

Description				
Reference	BSPF female thread	Nominal Ø (mm)	Flow rate (nominal in l/min)	Max operating pressure (bar)
HCIB 061101	G 1/4	6	12	250
HCIB 101102	G 3/8	10	23	250
HCIB 131103	G 1/2	13	45	250
HCIB 201104	G 3/4	20	106	250

Reference	BSPP female thread	Nominal Ø (mm)	Flow rate (nominal in l/min)	Max operating pressure (bar)
HCIB 251105	G 1	25	189	250

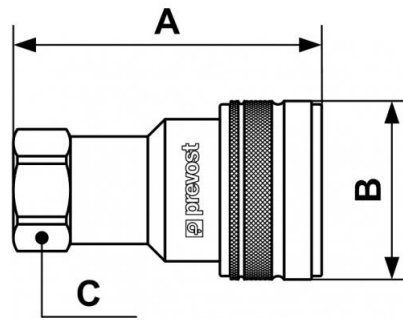

Dimensions

Reference	A mm	B mm	C mm
HCIB 061101	60	28	19
HCIB 101102	67.2	35	22
HCIB 131103	75.7	44	27
HCIB 201104	91.5	56	34
HCIB 251105	105.8	60	41