


ALTO 1 - 2-piece-set - Filter-Regulator-Lubricator (gauge included) with wall bracket



<p><u>BSPP female thread</u> G 1/8</p>	<p><u>Flow rate (l/min at 7 bar ΔP : 1 bar)</u> 500</p>	<p><u>Max operating pressure (bar)</u> 12</p>	<p><u>Filtration (μm)</u> 25</p>
<p><u>Temperature</u> +5°C to +50 °C</p>	<p><u>Construction</u> Body : Aluminium Polycarbonate bowl with metallic protection</p>	<p><u>Equipped with</u> Manual drain</p>	

Description					
Reference	BSPP female thread	Flow rate (l/min at 7 bar ΔP : 1 bar)	Max operating pressure (bar)	Filtration (μm)	Flow rate (l/min at 7 bar ΔP)

KTB SM0	G 1/8	500	12	25	1bar) = 500
KTB SM1	G 1/4		12	25	

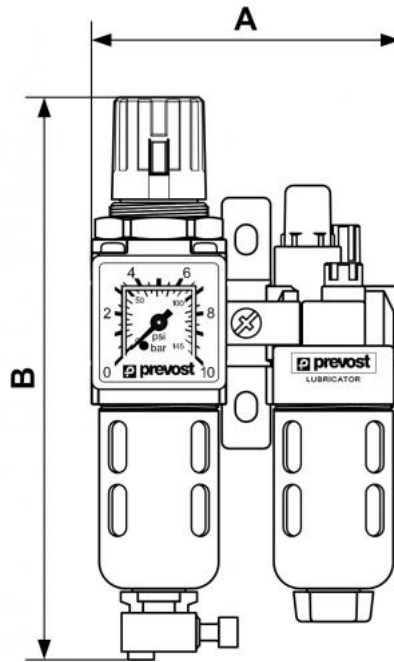

Dimensions

Reference	A mm	B mm
KTB SM0	92	170
KTB SM1	92	170