


Cyclone water separator with float drain



<p>Female thread (BSPP) G 1/2</p>	<p>Flow rate (m3/h) 155</p>	<p>Max operating pressure 16 bar</p>	<p>Temperature +1°C to +65°C</p>
<p>Construction Anodised Aluminium</p>	<p>Equipped with Automatic float drain</p>		

Description		
Reference	Female thread (BSPP)	Flow rate (m3/h)

SPC 155	G 1/2	155
SPC 235	G 3/4	235
SPC 365	G 1	365
SPC 770	G 1 1/2	770
SPC 1280	G 2	1280

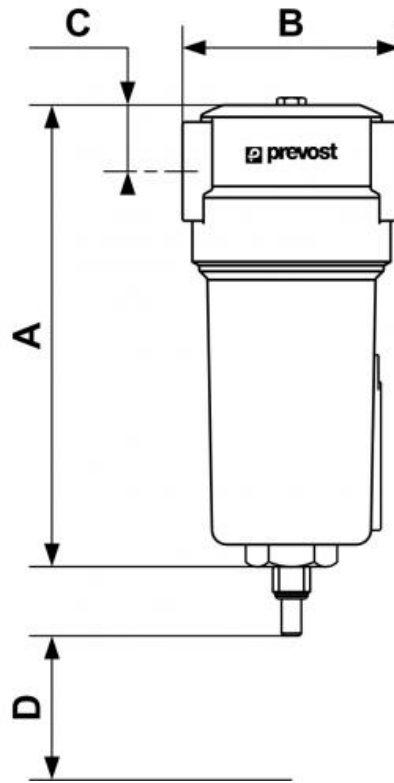

Dimensions

Reference	A mm	B mm	C mm	D mm
SPC 155	187	88	20	60
SPC 235	257	88	20	80
SPC 365	263	125	32	100
SPC 770	461	125	32	140
SPC 1280	684	163	43	520