

Cyclone water separator with float drain



Female thread (BSPP)

G 1/2

Flow rate (m3/h)

100

Max operating pressure

20 bar

Temperature


+1,5°C to +80°C

Construction

Aluminium

Description

Reference	Female thread (BSPP)	Flow rate (m ³ /h)
MSC 100	G 1/2	100
MSC 200	G 3/4	200
MSC 300	G 1	300
MSC 600	G 1 1/2	600
MSC 1200	G 2	1200

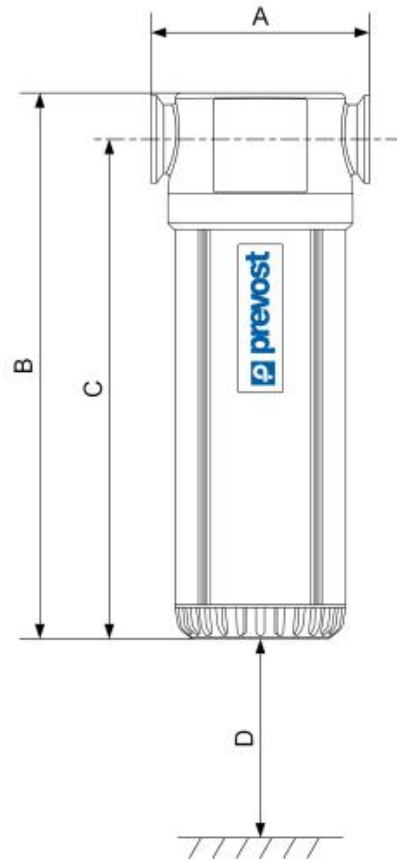

Dimensions

Reference	A mm	B mm	C mm	D mm
MSC 100	103	257.5	236	210
MSC 200	123	304	277	285
MSC 300	123	304	277	380
MSC 600	123	320	485	560
MSC 1200	160	484	443	560