

## Cyclone water separator with float drain



**Female thread (BSPP)**

G 3/4

**Flow rate (m3/h)**

235

**Max operating pressure**

16 bar

**Temperature**

+1°C to +65°C

**Construction**

Anodised Aluminium

**Equipped with**

Automatic float drain


### Description

Reference

Female thread (BSPP)

Flow rate (m3/h)

<b>SPC 155</b>	G 1/2	155
<b>SPC 235</b>	G 3/4	235
<b>SPC 365</b>	G 1	365
<b>SPC 770</b>	G 1 1/2	770
<b>SPC 1280</b>	G 2	1280

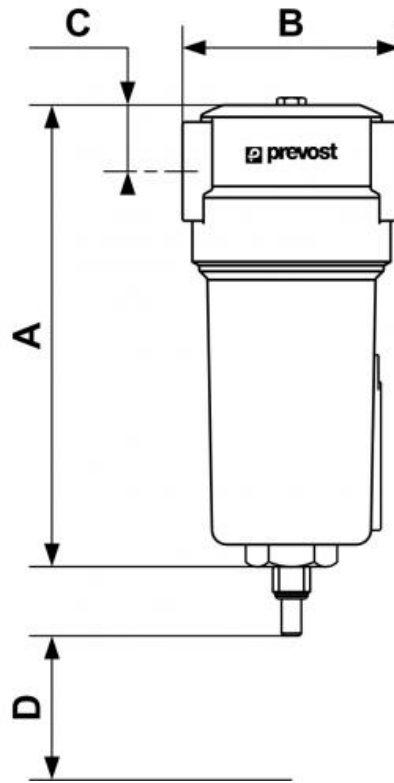

### Dimensions

Reference	A mm	B mm	C mm	D mm
<b>SPC 155</b>	187	88	20	60
<b>SPC 235</b>	257	88	20	80
<b>SPC 365</b>	263	125	32	100
<b>SPC 770</b>	461	125	32	140
<b>SPC 1280</b>	684	163	43	520