


Angle grinder



<p><u>Diameter (plate (mm))</u></p> <p>125 mm 5"</p>	<p><u>Consumption (l/min)</u></p> <p>85</p>	<p><u>Rotation speed (rpm)</u></p> <p>11 000</p>	<p><u>BSPT female thread</u></p> <p>R 1/4</p>
<p><u>Sound level (dB(A))</u></p> <p>90.4</p>	<p><u>Weight (kg)</u></p> <p>2</p>	<p><u>Max operating pressure</u></p> <p>6,2 bar</p>	<p><u>Applications</u></p> <p>Stripping and preparation prior to painting</p>
<p><u>Highlight</u></p> <p>Harsh conditions</p>	<p><u>Connection</u></p> <p>Supplied with 3 adaptors: ISO 6150 B; European 7,4 mm; ARO 210</p>		

Description						
Reference	Diameter (plate (mm))	Consumption (l/min)	Rotation speed (rpm)	BSPT female thread	Sound level (dB(A))	Weight (kg)
TAG 125	125 mm 5"	85	11 000	R 1/4	90.4	2

Reference	Diameter (plate (mm))	Consumption (l/min)	Rotation speed (rpm)	BSPTfemale thread	Sound level (dB(A))	Weight (kg)
TAG 178	178 mm 7"	113	6 000	R 3/8	91.9	3.3

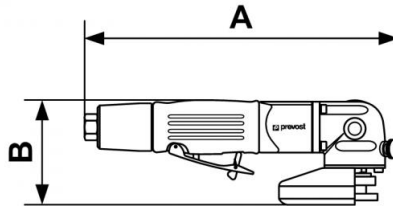

Dimensions

Reference	A mm	B mm
TAG 125	275	95
TAG 178	355	112