


Chisel hammer in case



<u>Chuck type (mm)</u> Hex. 10.2	<u>Impact rate (bpm)</u> 3000	<u>Piston stroke (mm)</u> 60	<u>Consumption (l/min)</u> 187
<u>BSPT female thread</u> R 1/4	<u>Sound level (dB(A))</u> 115	<u>Weight (kg)</u> 1.7	<u>Max operating pressure</u> 6,2 bar
<u>Applications</u> Hammering, riveting and cutting	<u>Connection</u> Supplied with 3 adaptors: ISO 6150 B; European 7,4 mm; ARO 210		

Description							
Reference	Chuck type (mm)	Impact rate (bpm)	Piston stroke (mm)	Consumption (l/min)	BSPT female thread	Sound level (dB(A))	Weight (kg)
TAH 0663000K	Hex. 10.2	3000	60	187	R 1/4	115	1.7

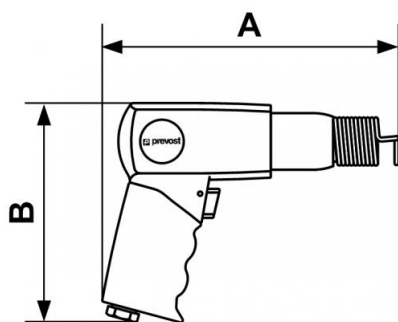

Dimensions

Reference	A mm	B mm
TAH 0663000K	175	150