


Precision axial grinder



<u>Collet size (mm)</u> 3	<u>Consumption (l/min)</u> 60	<u>Power (CV - W)</u> 0.5 CV - 370 W	<u>Rotation speed (rpm)</u> 60 000
<u>BSPT male thread</u> R 1/4	<u>Sound level (dB(A))</u> 95	<u>Weight (kg)</u> 0.3	<u>Max operating pressure</u> 6,2 bar
<u>Applications</u> Grinding, milling and sawing	<u>Connection</u> Supplied with 3 adaptors: ISO 6150 B; European 7,4 mm; ARO 210		

Description							
Reference	Collet size (mm)	Consumption (l/min)	Power (CV - W)	Rotation speed (rpm)	BSPT male thread	Sound level (dB(A))	Weight (kg)
TDG M60000	3	60	0.5 CV - 370 W	60 000	R 1/4	95	0.3

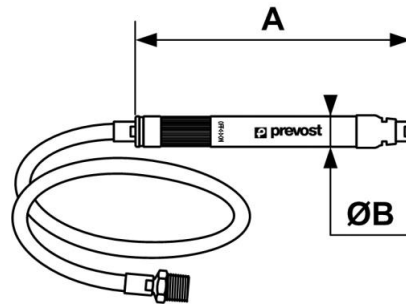

Dimensions

Reference	A mm	B mm
TDG M60000	140	16.5