


Straight grinder



<p><u>Collet size (mm)</u></p> <p>3 and 6</p>	<p><u>Consumption (l/min)</u></p> <p>113</p>	<p><u>Power (CV - W)</u></p> <p>0.5 CV - 370 W</p>	<p><u>Rotation speed (rpm)</u></p> <p>4 000</p>
<p><u>BSPT female thread</u></p> <p>R 1/4</p>	<p><u>Sound level (dB(A))</u></p> <p>80</p>	<p><u>Weight (kg)</u></p> <p>1.00</p>	<p><u>Max operating pressure</u></p> <p>6,2 bar</p>
<p><u>Applications</u></p> <p>Grinding, milling and sawing</p>	<p><u>Connection</u></p> <p>Supplied with 3 adaptors: ISO 6150 B; European 7,4 mm; ARO 210</p>		

Description							
Reference	Collet size (mm)	Consumption (l/min)	Power (CV - W)	Rotation speed (rpm)	BSPT female thread	Sound level (dB(A))	Weight (kg)
TDG S04000	3 and 6	113	0.5 CV - 370 W	4 000	R 1/4	80	1.00
TDG S22000	3 and 6	113	0.5 CV - 370 W	22 000	R 1/4	84	0.7

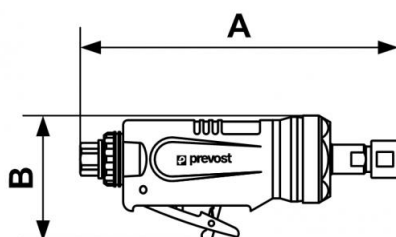

Dimensions

Reference	A mm	B mm
TDG S04000	210	70
TDG S22000	170	70