


Straight grinder



<u>Collet size (mm)</u> 3 and 6	<u>Consumption (l/min)</u> 113	<u>Power (CV - W)</u> 0.5 CV - 370 W	<u>Rotation speed (rpm)</u> 4 000
<u>BSPT female thread</u> R 1/4	<u>Sound level (dB(A))</u> 80	<u>Weight (kg)</u> 1.00	<u>Max operating pressure</u> 6,2 bar
<u>Applications</u> Grinding, milling and sawing	<u>Connection</u> Supplied with 3 adaptors: ISO 6150 B; European 7,4 mm; ARO 210		

Description							
Reference	Collet size (mm)	Consumption (l/min)	Power (CV - W)	Rotation speed (rpm)	BSPT female thread	Sound level (dB(A))	Weight (kg)
TDG S04000	3 and 6	113	0.5 CV - 370 W	4 000	R 1/4	80	1.00
TDG S22000	3 and 6	113	0.5 CV - 370 W	22 000	R 1/4	84	0.7

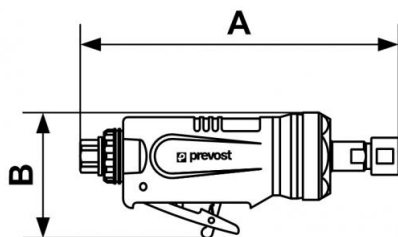

Dimensions

Reference	A mm	B mm
TDG S04000	210	70
TDG S22000	170	70