


## Straight grinder



|   |  |   |  |
|---|--|---|--|
| <u>Collet size (mm)</u><br>3 and 6                  | <u>Consumption (l/min)</u><br>113  | <u>Power (CV - W)</u><br>0.5 CV - 370 W | <u>Rotation speed (rpm)</u><br>4 000     |
| <u>BSPT female thread</u><br>R 1/4                  | <u>Sound level (dB(A))</u><br>80   | <u>Weight (kg)</u><br>1.00              | <u>Max operating pressure</u><br>6,2 bar |
| <u>Applications</u><br>Grinding, milling and sawing | <u>Connection</u><br>Supplied with 3 adaptors:<br>ISO 6150 B; European 7,4 mm; ARO 210 |   |  |

| Description       |                  |                     |                |                      |                    |                     |             |
|-------------------|------------------|---------------------|----------------|----------------------|--------------------|---------------------|-------------|
| Reference         | Collet size (mm) | Consumption (l/min) | Power (CV - W) | Rotation speed (rpm) | BSPT female thread | Sound level (dB(A)) | Weight (kg) |
| <b>TDG S04000</b> | 3 and 6          | 113                 | 0.5 CV - 370 W | 4 000                | R 1/4              | 80                  | 1.00        |
| <b>TDG S22000</b> | 3 and 6          | 113                 | 0.5 CV - 370 W | 22 000               | R 1/4              | 84                  | 0.7         |

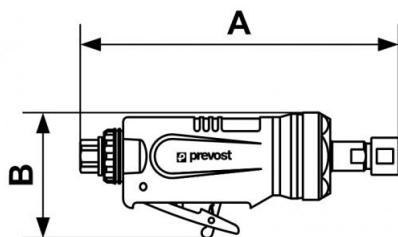

### Dimensions

| Reference         | A mm | B mm |
|-------------------|------|------|
| <b>TDG S04000</b> | 210  | 70   |
| <b>TDG S22000</b> | 170  | 70   |