


Angled impact wrench - Single hammer



<p>Square driver</p> <p>1/2"</p>	<p>Max. unscrew torque (Nm)</p> <p>244</p>	<p>Consumption (l/min)</p> <p>142</p>	<p>Rotation speed (rpm)</p> <p>7000</p>
<p>BSPT female thread</p> <p>R 1/4</p>	<p>Sound level (dB(A))</p> <p>97</p>	<p>Weight (kg)</p> <p>1.8</p>	<p>Max operating pressure</p> <p>6,2 bar</p>
<p>Applications</p> <p>Fitting and removal of bolts and screws</p>	<p>Highlight</p> <p>Tightening capacity</p>	<p>Connection</p> <p>Supplied with 3 adaptors: ISO 6150 B; European 7,4 mm; ARO 210</p>	

Description							
Reference	Square driver	Max. unscrew torque (Nm)	Consumption (l/min)	Rotation speed (rpm)	BSPT female thread	Sound level (dB(A))	Weight (kg)

TIW C120270	1/2"	244	142	7000	R 1/4	97	1.8
----------------	------	-----	-----	------	-------	----	-----

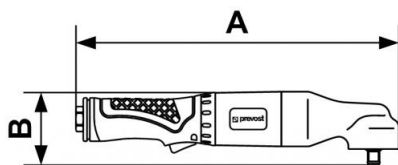

Dimensions

Reference	A mm	B mm
TIW C120270	342	80