


## Angled impact wrench - Single hammer



<p><b>Square driver</b> 1/2"</p>	<p><b>Max. unscrew torque (Nm)</b> 244</p>	<p><b>Consumption (l/min)</b> 142</p>	<p><b>Rotation speed (rpm)</b> 7000</p>
<p><b>BSPT female thread</b> R 1/4</p>	<p><b>Sound level (dB(A))</b> 97</p>	<p><b>Weight (kg)</b> 1.8</p>	<p><b>Max operating pressure</b> 6,2 bar</p>
<p><b>Applications</b> Fitting and removal of bolts and screws</p>	<p><b>Highlight</b> Tightening capacity</p>	<p><b>Connection</b> Supplied with 3 adaptors: ISO 6150 B; European 7,4 mm; ARO 210</p>	

Description							
Reference	Square driver	Max. unscrew torque (Nm)	Consumption (l/min)	Rotation speed (rpm)	BSPT female thread	Sound level (dB(A))	Weight (kg)

TIW C120270	1/2"	244	142	7000	R 1/4	97	1.8
----------------	------	-----	-----	------	-------	----	-----

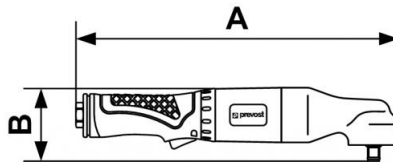

### Dimensions

Reference	A mm	B mm
<b>TIW C120270</b>	342	80