


## Orbital sander



|   |  |  |   |
|---|--|--|---|
| <b><u>Offset (mm)</u></b><br>2.5  | <b><u>Diameter (plate)</u></b><br>152 mm 6"                | <b><u>Consumption (l/min)</u></b><br>212   | <b><u>Rotation speed (rpm)</u></b><br>10 000    |
| <b><u>BSPT female thread</u></b><br>R 1/4                                 | <b><u>Sound level (dB(A))</u></b><br>84                    | <b><u>Weight (kg)</u></b><br>0.77  | <b><u>Max operating pressure</u></b><br>6,2 bar |
| <b><u>Applications</u></b><br>Stripping and preparation prior to painting | <b><u>Highlight</u></b><br>Easy to use and low sound level | <b><u>Connection</u></b><br>Supplied with 3 adaptors: ISO 6150 B; European 7,4 mm; ARO 210 |   |

| Description      |             |                  |                     |                      |                    |                     |             |
|------------------|-------------|------------------|---------------------|----------------------|--------------------|---------------------|-------------|
| Reference        | Offset (mm) | Diameter (plate) | Consumption (l/min) | Rotation speed (rpm) | BSPT female thread | Sound level (dB(A)) | Weight (kg) |
| <b>TOS 15025</b> | 2.5         | 152 mm 6"        | 212                 | 10 000               | R 1/4              | 84                  | 0.77        |

| Reference            | Offset (mm) | Diameter (plate) | Consumption (l/min) | Rotation speed (rpm) | BSPT female thread | Sound level (dB(A)) | Weight (kg) |
|----------------------|-------------|------------------|---------------------|----------------------|--------------------|---------------------|-------------|
| <b>TOS<br/>15050</b> | 5           | 152 mm 6"        | 212                 | 10 000               | R 1/4              | 78.9                | 0.77        |

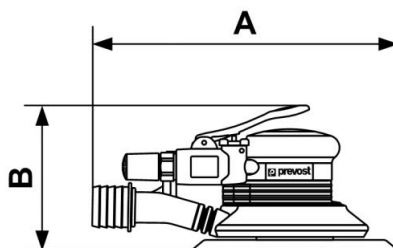

### Dimensions

| Reference        | A mm | B mm |
|------------------|------|------|
| <b>TOS 15025</b> | 221  | 105  |
| <b>TOS 15050</b> | 221  | 105  |