


Orbital sander



<u>Offset (mm)</u> 2.5	<u>Diameter (plate)</u> 152 mm 6"	<u>Consumption (l/min)</u> 212	<u>Rotation speed (rpm)</u> 10 000
<u>BSPT female thread</u> R 1/4	<u>Sound level (dB(A))</u> 84	<u>Weight (kg)</u> 0.77	<u>Max operating pressure</u> 6,2 bar
<u>Applications</u> Stripping and preparation prior to painting	<u>Highlight</u> Easy to use and low sound level	<u>Connection</u> Supplied with 3 adaptors: ISO 6150 B; European 7,4 mm; ARO 210	

Description							
Reference	Offset (mm)	Diameter (plate)	Consumption (l/min)	Rotation speed (rpm)	BSPT female thread	Sound level (dB(A))	Weight (kg)
TOS 15025	2.5	152 mm 6"	212	10 000	R 1/4	84	0.77

Reference	Offset (mm)	Diameter (plate)	Consumption (l/min)	Rotation speed (rpm)	BSPT female thread	Sound level (dB(A))	Weight (kg)
TOS 15050	5	152 mm 6"	212	10 000	R 1/4	78.9	0.77

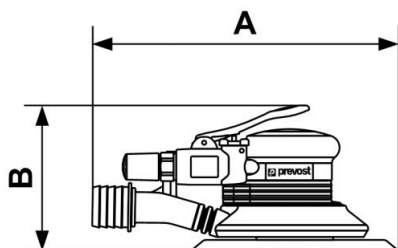

Dimensions

Reference	A mm	B mm
TOS 15025	221	105
TOS 15050	221	105