


## Torque control straight air screwdriver



<p><b><u>Chuck type</u></b> 6.35 mm Hex. 1/4"</p>	<p><b><u>Torque (Nm)</u></b> 0.4 - 2</p>	<p><b><u>Consumption (l/min)</u></b> 113</p>	<p><b><u>Rotation speed (rpm)</u></b> 1000</p>
<p><b><u>BSPT female thread</u></b> R 1/4</p>	<p><b><u>Sound level (dB(A))</u></b> 82</p>	<p><b><u>Weight (kg)</u></b> 0.75</p>	<p><b><u>Max operating pressure</u></b> 6,2 bar</p>
<p><b><u>Applications</u></b> Automotive and industrial sectors</p>	<p><b><u>Connection</u></b> Supplied with 3 adaptors: ISO 6150 B; European 7,4 mm; ARO 210</p>		

Description							
Reference	Chuck type	Torque (Nm)	Consumption (l/min)	Rotation speed (rpm)	BSPT female thread	Sound level (dB(A))	Weight (kg)
<b>TSD S1000E</b>	6.35 mm Hex. 1/4"	0.4 - 2	113	1000	R 1/4	82	0.75

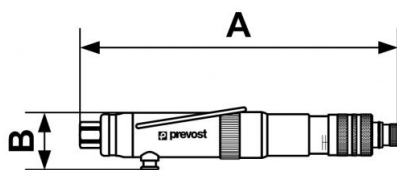

### Dimensions

Reference	A mm	B mm
<b>TSD S1000E</b>	230	41