

## Composite air impact wrench - Twin hammer - Reinforced twin hammer - In case



### Square driver

3/4"

### Max. unscrew torque (Nm)

1763

### Consumption (l/min)

206

### Rotation speed (rpm)

6000

### BSPT female thread

R 3/8

### Sound level (dB(A))

97.8

### Weight (kg)

7.5

### Max operating pressure

6,2 bar

### Applications

Fitting and removal of bolts and screws

### Highlight


Tightening capacity

### Connection

Supplied with 3 adaptors: ISO 6150 B; European 7,4 mm; ARO 210

## Description

Reference	Square driver	Max. unscrew torque (Nm)	Consumption (l/min)	Rotation speed (rpm)	BSPT female thread	Sound level (dB(A))	Weight (kg)
<b>TIW C341630K</b>	3/4"	1763	206	6000	R 3/8	97.8	7.5

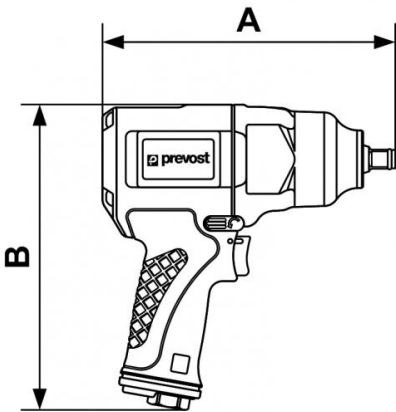

Dimensions		
Reference	A mm	B mm
TIW C341630K	222	223