


## thread hydraulic High-Pressure adaptor



<p><b><u>NPT male thread</u></b> 1/4</p>	<p><b><u>Nominal Ø (mm)</u></b> 6</p>	<p><b><u>Flow rate (nominal in l/min)</u></b> 5</p>	<p><b><u>Max operating pressure (bar)</u></b> 700</p>
<p><b><u>Profile</u></b> Interchangeable</p>	<p><b><u>Technology</u></b> Screw lock</p>	<p><b><u>Temperature</u></b> -25°C to +100°C</p>	<p><b><u>Construction</u></b> Body: steel</p>
<p><b><u>Applications</u></b> Auto : cylinders, press extractors</p>	<p><b><u>Highlight</u></b> Pressurised connection</p>	<p><b><u>Connection</u></b> Manual screw thread</p>	

Description				
Reference	NPT male thread	Nominal Ø (mm)	Flow rate (nominal in l/min)	Max operating pressure (bar)
<b>HBC 066201</b>	1/4	6	5	700
<b>HBC 106202</b>	3/8	10	9	700

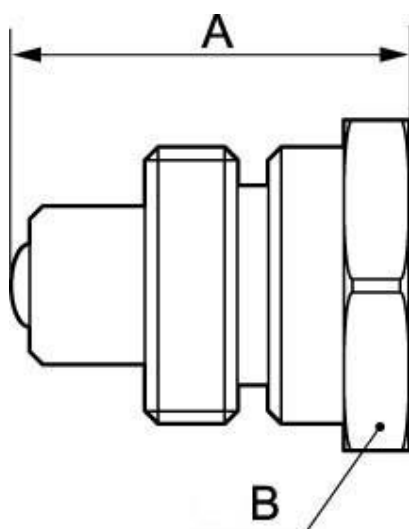

**Dimensions**

Reference	A mm	B mm
<b>HBC 066201</b>	39	39
<b>HBC 106202</b>	40.5	32