


## Hydraulic coupler with flat ends



<u><b>BSPP female thread</b></u> G 1/4	<u><b>Nominal Ø (mm)</b></u> 6	<u><b>Flow rate (nominal in l/min)</b></u> 12	<u><b>Max operating pressure (bar)</b></u> 300
<u><b>Profile</b></u> ISO F	<u><b>Technology</b></u> Ball lock	<u><b>Temperature</b></u> -25°C to +100°C	<u><b>Construction</b></u> Body: steel
<u><b>Applications</b></u> Industry	<u><b>Connection</b></u> Automatic		

Description				
Reference	BSPP female thread	Nominal Ø (mm)	Flow rate (nominal in l/min)	Max operating pressure (bar)
<b>HFP 061101</b>	G 1/4	6	12	300
<b>HFP 131102</b>	G 3/8	13	23	250
<b>HFP 131103</b>	G 1/2	13	23	250

Reference	BSPP female thread	Nominal Ø (mm)	Flow rate (nominal in l/min)	Max operating pressure (bar)
<b>HFP 201103</b>	G 1/2	20	45	250
<b>HFP 201104</b>	G 3/4	20	45	250
<b>HFP 251104</b>	G 3/4	25	100	250
<b>HFP 251105</b>	G 1	25	100	250

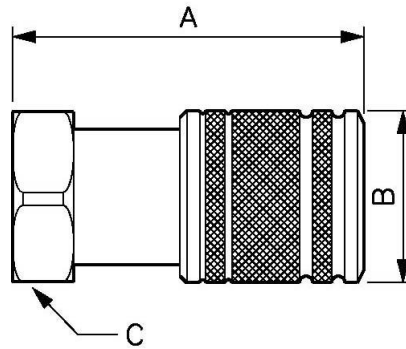

### Dimensions

Reference	A mm	B mm	C mm
<b>HFP 061101</b>	52.5	27	22
<b>HFP 131102</b>	66	30	27
<b>HFP 131103</b>	71.5	30	27
<b>HFP 201103</b>	78.5	38	32
<b>HFP 201104</b>	84	38	36
<b>HFP 251104</b>	86	48	46
<b>HFP 251105</b>	87.5	48	46