


ISO A-Series hydraulic Push-Pull coupler



<p><u>Female thread</u> G 1/2</p>	<p><u>Nominal Ø (mm)</u> 13</p>	<p><u>Flow rate (nominal in l/min)</u> 45</p>	<p><u>Max operating pressure (bar)</u> 250</p>
<p><u>Technology</u> Ball lock</p>	<p><u>Temperature</u> -25°C to +100°C</p>	<p><u>Construction</u> Body: steel</p>	<p><u>Applications</u> Agricultural</p>
<p><u>Connection</u> Semi-automatic</p>			

Description				
Reference	Female thread	Nominal Ø (mm)	Flow rate (nominal in l/min)	Max operating pressure (bar)
HPA 131103	G 1/2	13	45	250
HPA 131221	M22 x 1.5	13	45	250

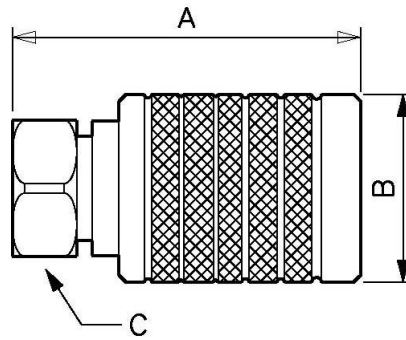

Dimensions

Reference	A mm	B mm	C mm
HPA 131103	70	38	27
HPA 131221	70	38	27