


## ISO A-Series hydraulic Push-Pull coupler



<b><u>Female thread</u></b> G 1/2	<b><u>Nominal Ø (mm)</u></b> 13	<b><u>Flow rate (nominal in l/min)</u></b> 45	<b><u>Max operating pressure (bar)</u></b> 250
<b><u>Technology</u></b> Ball lock	<b><u>Temperature</u></b> -25°C to +100°C	<b><u>Construction</u></b> Body: steel	<b><u>Applications</u></b> Agricultural
<b><u>Connection</u></b> Semi-automatic			

Description				
Reference	Female thread	Nominal Ø (mm)	Flow rate (nominal in l/min)	Max operating pressure (bar)
<b>HPA 131103</b>	G 1/2	13	45	250
<b>HPA 131221</b>	M22 x 1.5	13	45	250

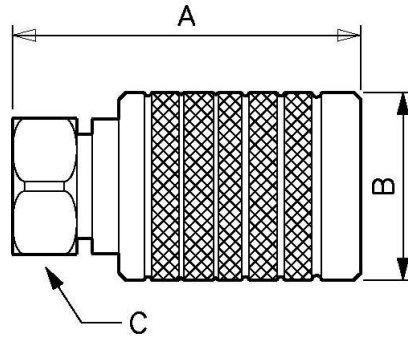

### Dimensions

Reference	A mm	B mm	C mm
<b>HPA 131103</b>	70	38	27
<b>HPA 131221</b>	70	38	27