


## ISO A-Series hydraulic Push-Pull coupler



<u>Female thread</u> G 1/2	<u>Nominal Ø (mm)</u> 13	<u>Flow rate (nominal in l/min)</u> 45	<u>Max operating pressure (bar)</u> 250
<u>Technology</u> Ball lock	<u>Temperature</u> -25°C to +100°C	<u>Construction</u> Body: steel	<u>Applications</u> Agricultural
<u>Connection</u> Semi-automatic			

Description				
Reference	Female thread	Nominal Ø (mm)	Flow rate (nominal in l/min)	Max operating pressure (bar)
<b>HPA 131103</b>	G 1/2	13	45	250
<b>HPA 131221</b>	M22 x 1.5	13	45	250

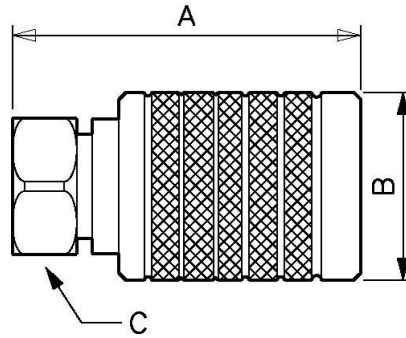

### Dimensions

Reference	A mm	B mm	C mm
<b>HPA 131103</b>	70	38	27
<b>HPA 131221</b>	70	38	27