


prevoS1 blow gun with OSHA metal nozzle



Blowing force (at 6 bar (g)) 248	Dynamic pressure (at 10 mm at 6 bar (bar)) 2.3	Air consumption (at 6 bar (Nm3/h)) 13	Sound level (at 6 bar (dBA)) 85
Max operating pressure 12 bar	Temperature -15°C to +70°C	Construction Polyamide composite body	Highlight Compact
Connection Built-in adaptor			

Description				
Reference	Blowing force (at 6 bar (g))	Dynamic pressure (at 10 mm at 6 bar (bar))	Air consumption (at 6 bar (Nm3/h))	Sound level (at 6 bar (dBA))
UBG 06MTLH	248	2.3	13	85

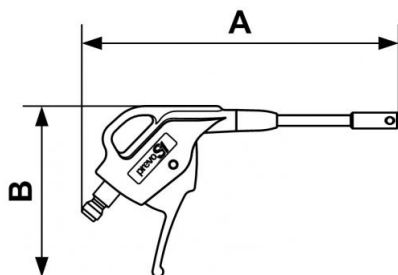

Dimensions

Reference	A mm	B mm
UBG 06MTLH	169	97