


## prevoS1 blow gun with OSHA metal nozzle



<b>Blowing force (at 6 bar (g))</b> 248	<b>Dynamic pressure (at 10 mm at 6 bar (bar))</b> 2.3	<b>Air consumption (at 6 bar (Nm3/h))</b> 13	<b>Sound level (at 6 bar (dBA))</b> 85
<b>Max operating pressure</b> 12 bar	<b>Temperature</b> -15°C to +70°C	<b>Construction</b> Polyamide composite body	<b>Highlight</b> Compact
<b>Connection</b> Built-in adaptor			

Description				
Reference	Blowing force (at 6 bar (g))	Dynamic pressure (at 10 mm at 6 bar (bar))	Air consumption (at 6 bar (Nm3/h))	Sound level (at 6 bar (dBA))
<b>UBG 06MTLH</b>	248	2.3	13	85

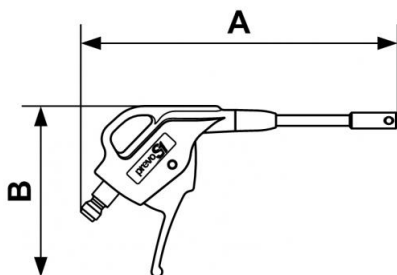

### Dimensions

Reference	A mm	B mm
<b>UBG 06MTLH</b>	169	97