


prevoS1 blow gun with OSHA polyamide composite nozzle - Pocket model



| | | | |
|---|---|--|--|
| <p>Blowing force (at 6 bar (g))</p> <p>168</p> | <p>Dynamic pressure (at 10 mm at 6 bar (bar))</p> <p>0.5</p> | <p>Air consumption (at 6 bar (Nm3/h))</p> <p>14</p> | <p>Sound level (at 6 bar (dBA))</p> <p>89</p> |
| <p>Max operating pressure</p> <p>12 bar</p> | <p>Temperature</p> <p>-15°C to +70°C</p> | <p>Construction</p> <p>Polyamide composite body</p> | <p>Highlight</p> <p>Compact</p> |
| <p>Connection</p> <p>Built-in adaptor</p> | | | |

Description

| Reference | Blowing force (at 6 bar (g)) | Dynamic pressure (at 10 mm at 6 bar (bar)) | Air consumption (at 6 bar (Nm ³ /h)) | Sound level (at 6 bar (dBA)) |
|------------------|------------------------------|--|---|------------------------------|
| UPG 06OSH | 168 | 0.5 | 14 | 89 |

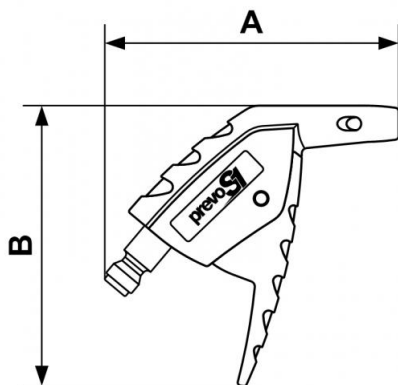

Dimensions

| Reference | A mm | B mm |
|------------------|------|------|
| UPG 06OSH | 97 | 93 |