


prevoS1 blow gun with OSHA metal nozzle



<u>Blowing force (at 6 bar (g))</u> 248	<u>Dynamic pressure (at 10 mm at 6 bar (bar))</u> 2.3	<u>Air consumption (at 6 bar (Nm3/h))</u> 13	<u>Sound level (at 6 bar (dBA))</u> 85
<u>Max operating pressure</u> 12 bar	<u>Temperature</u> -15°C to +70°C	<u>Construction</u> Polyamide composite body	<u>Highlight</u> Compact
<u>Connection</u> Built-in adaptor			

Description				
Reference	Blowing force (at 6 bar (g))	Dynamic pressure (at 10 mm at 6 bar (bar))	Air consumption (at 6 bar (Nm3/h))	Sound level (at 6 bar (dBA))

EBG 07MTLH	248	2.3	13	85
------------	-----	-----	----	----

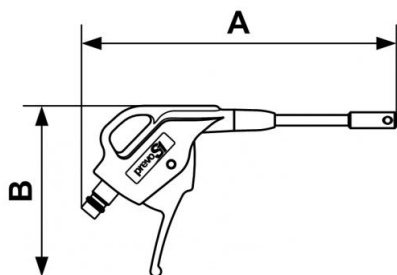

Dimensions

Reference	A mm	B mm
EBG 07MTLH	178	97