


# ALTO 1 - 2-piece-set - Filter-Regulator-Lubricator (gauge included) with wall bracket and prevoS1 safety quick release coupler



<p><b><u>BSPP female thread</u></b> G 1/4</p>	<p><b><u>Flow rate (l/min at 7 bar ΔP)</u></b> 1bar) = 500</p>	<p><b><u>Max operating pressure (bar)</u></b> 12</p>	<p><b><u>Filtration (μm)</u></b> 25</p>
<p><b><u>Equipped with 1 coupling</u></b> BSI 06</p>	<p><b><u>Temperature</u></b> +5°C to +50 °C</p>	<p><b><u>Construction</u></b> Body : Aluminium Polycarbonate bowl with metallic protection</p>	<p><b><u>Equipped with</u></b> Manual drain</p>

Description						
Reference	BSPP female thread	Flow rate (l/min at 7 bar ΔP)	Max operating pressure (bar)	Filtration (μm)	Equipped with 1 coupling	Flow rate (l/min at 7 bar ΔP : 1bar)

<b>KTB SM1BS</b>	G 1/4	1bar) = 500	12	25	BSI 06	500
<b>KTB SM1ES</b>	G 1/4	1bar) = 500	12	25	ESI 07	
<b>KTB SM1IS</b>	G 1/4		12	25	ISI 06	

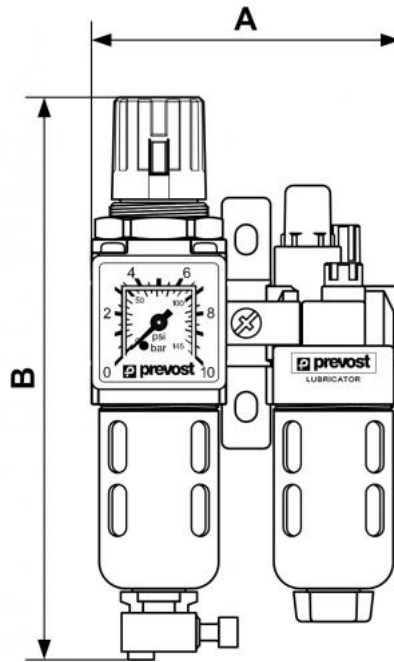

### Dimensions

Reference	A mm	B mm
<b>KTB SM1BS</b>	92	170
<b>KTB SM1ES</b>	92	170
<b>KTB SM1IS</b>	3.622	6.693