

## ALTO 1 - Filter-Regulator (gauge included) with wall bracket and prevoS1 safety quick release coupler



### BSPP female thread

G 1/4

### Flow rate (l/min at 7 bar $\Delta P$ )

1bar) = 550

### Max operating pressure (bar)

12

### Filtration ( $\mu m$ )

25

### Equipped with 1 coupling

BSI 06

### Temperature

+5°C to +50 °C

### Construction

Body : Aluminium  
Polycarbonate bowl with metallic protection


### Equipped with

Manual drain

## Description

Reference	BSPP female thread	Flow rate (l/min at 7 bar $\Delta P$ )	Max operating pressure (bar)	Filtration ( $\mu m$ )	Equipped with 1 coupling
<b>KTM SM1BS</b>	G 1/4	1bar) = 550	12	25	BSI 06
<b>KTM SM1ES</b>	G 1/4	1bar) = 550	12	25	ESI 07

Reference	BSPP female thread	Flow rate(l/min at 7 bar $\Delta$ P	Max operating pressure (bar)	Filtration ( $\mu$ m)	Equipped with 1 coupling
<b>KTM SM1IS</b>	G 1/4	1bar) = 550	12	25	ISI 06

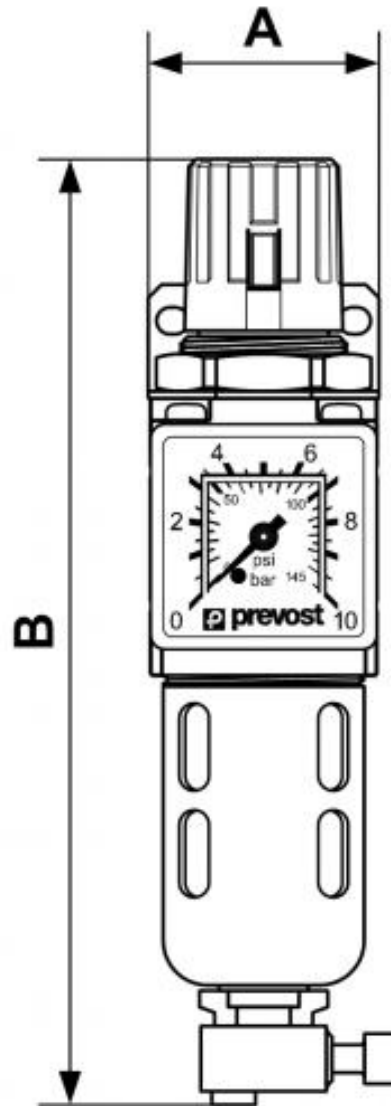

### Dimensions

Reference	A mm	B mm
<b>KTM SM1BS</b>	40	170
<b>KTM SM1ES</b>	40	170
<b>KTM SM1IS</b>	40	170