


## Sandblaster



<p><b><u>Inlet BSPP female thread</u></b> G 1/4</p>	<p><b><u>Capacity (l)</u></b> 1.2</p>	<p><b><u>Flow rate (at 8 bar (l/min))</u></b> 450</p>	<p><b><u>Construction (Tank)</u></b> High density polyethylene</p>
<p><b><u>Operating pressure</u></b> 6 to 12 bar</p>	<p><b><u>Temperature</u></b> -10°C to + 80°C</p>	<p><b><u>Construction</u></b> Acetal plastic body</p>	<p><b><u>Applications</u></b> Stripping - cleaning Automotive sector, industry</p>

Description				
Reference	Inlet BSPP female thread	Capacity (l)	Flow rate (at 8 bar (l/min))	Construction (Tank)
<b>BG SAND1</b>	G 1/4	1.2	450	High density polyethylene

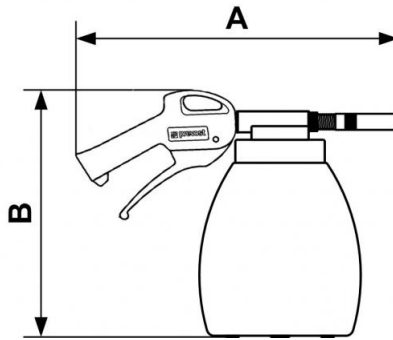

### Dimensions

Reference	A mm	B mm
<b>BG SAND1</b>	260	200