

Sandblaster



**Inlet BSPP female
thread**

G 1/4

Capacity (l)

1.2

**Flow rate (at 8 bar
(l/min))**

450

Construction (Tank)

High density polyethylene

Operating pressure

6 to 12 bar

Temperature

-10°C to + 80°C

Construction

Acetal plastic body


Applications

Stripping - cleaning

Automotive sector, industry

Description

Reference	Inlet BSPP female thread	Capacity (l)	Flow rate (at 8 bar (l/min))	Construction (Tank)
BG SAND1	G 1/4	1.2	450	High density polyethylene

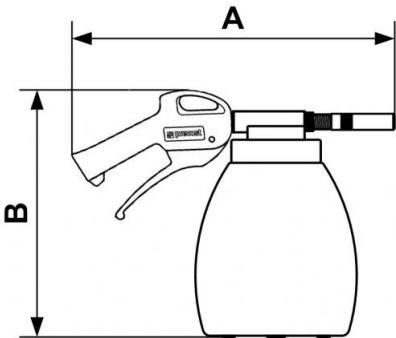

Dimensions		
Reference	A mm	B mm
BG SAND1	260	200