


Spraygun for cleaning



<p><u>Inlet BSPP female thread</u></p> <p>G 1/4</p>	<p><u>Capacity (l)</u></p> <p>1.2</p>	<p><u>Flow rate (at 8 bar (l/min))</u></p> <p>100</p>	<p><u>Construction (Tank)</u></p> <p>high density polyethylene</p>
<p><u>Operating pressure</u></p> <p>6 to 12 bar</p>	<p><u>Temperature</u></p> <p>-10°C to + 80°C</p>	<p><u>Construction</u></p> <p>Acetal plastic body</p>	<p><u>Applications</u></p> <p>Stripping - cleaning Automotive sector, industry</p>

Description				
Reference	Inlet BSPP female thread	Capacity (l)	Flow rate (at 8 bar (l/min))	Construction (Tank)
BG SPRAY1	G 1/4	1.2	100	high density polyethylene

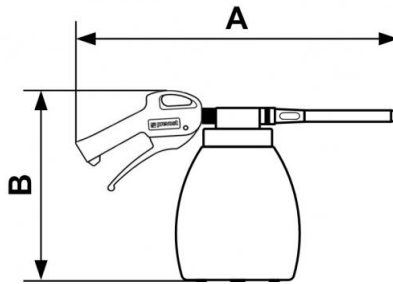

Dimensions

Reference	A mm	B mm
BG SPRAY1	350	200