

## Spraygun for cleaning



**Inlet BSPP female thread**

G 1/4

**Capacity (l)**

1.2

**Flow rate (at 8 bar (l/min))**

100

**Construction (Tank)**

high density polyethylene

**Operating pressure**

6 to 12 bar

**Temperature**

-10°C to + 80°C

**Construction**

Acetal plastic body


**Applications**

Stripping - cleaning

Automotive sector, industry

### Description

Reference	Inlet BSPP female thread	Capacity (l)	Flow rate (at 8 bar (l/min))	Construction (Tank)
<b>BG SPRAY1</b>	G 1/4	1.2	100	high density polyethylene

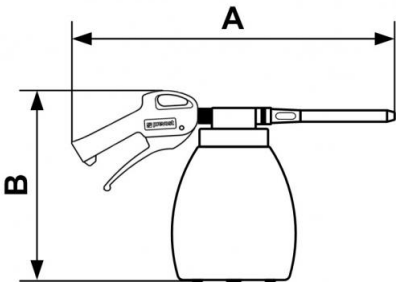

Dimensions		
Reference	A mm	B mm
BG SPRAY1	350	200