


Straight needle scaler



<u>Impact rate (bpm)</u> 4200	<u>Piston stroke (mm)</u> 26	<u>BSPT female thread</u> R 1/4	<u>Consumption (l/min)</u> 60
<u>Sound level (dB(A))</u> 106	<u>Weight (kg)</u> 1.6	<u>Max operating pressure</u> 6,2 bar	<u>Applications</u> Stripping
<u>Connection</u> Supplied with 3 adaptors: ISO 6150 B; European 7,4 mm; ARO 210			

Description						
Reference	Impact rate (bpm)	Piston stroke (mm)	BSPT female thread	Consumption (l/min)	Sound level (dB(A))	Weight (kg)
TSP 0264300	4200	26	R 1/4	60	106	1.6

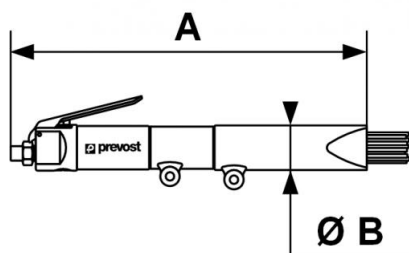

Dimensions

Reference	A mm	B mm
TSP 0264300	360	35