


Straight needle scaler



| | | | |
|---|--|---|---|
| <u>Impact rate (bpm)</u> 4200 | <u>Piston stroke (mm)</u> 26 | <u>BSPT female thread</u> R 1/4 | <u>Consumption (l/min)</u> 60 |
| <u>Sound level (dB(A))</u> 106 | <u>Weight (kg)</u> 1.6 | <u>Max operating pressure</u> 6,2 bar | <u>Applications</u> Stripping |
| <u>Connection</u> Supplied with 3 adaptors: ISO 6150 B; European 7,4 mm; ARO 210 | | | |

| Description | | | | | | |
|------------------------|-------------------|--------------------|--------------------|---------------------|---------------------|-------------|
| Reference | Impact rate (bpm) | Piston stroke (mm) | BSPT female thread | Consumption (l/min) | Sound level (dB(A)) | Weight (kg) |
| TSP 0264300 | 4200 | 26 | R 1/4 | 60 | 106 | 1.6 |

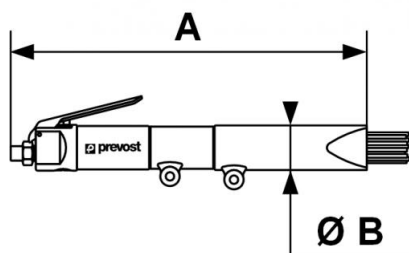

Dimensions

| Reference | A mm | B mm |
|--------------------|------|------|
| TSP 0264300 | 360 | 35 |