


PPS1 TR - Aluminium reducing tee fitting



<p><u>For pipe OD (mm)</u></p> <p>16</p>	<p><u>Technology</u></p> <p>PPS Grip Concept</p>	<p><u>Operating pressure</u></p> <p>0 to 16 bar</p>	<p><u>Vacuum capability</u></p> <p>-0.98 bar (vacuum 98%)</p>
<p><u>Temperature</u></p> <p>-20°C to +80°C</p>	<p><u>Construction</u></p> <p>Pipe and fittings: alu.</p>	<p><u>Highlight</u></p> <p>Scalable system</p>	<p><u>Meets standards</u></p> <p>PED REACH</p>

Description	
Reference	For pipe OD (mm)
PPS1 TR2016	16
PPS1 TR2516	16
PPS1 TR2520	20
PPS1 TR3216	16
PPS1 TR3220	20
PPS1 TR3225	25

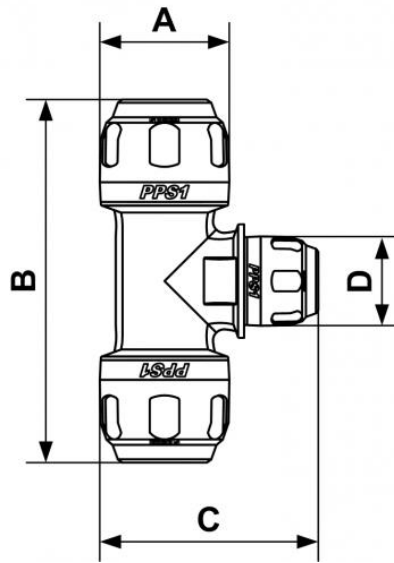

Dimensions

Reference	A mm	B mm	C mm	D mm
PPS1 TR2016	66	108	38	32
PPS1 TR2516	78	131	46	32
PPS1 TR2520	83	131	46	38
PPS1 TR3216	91	155	57	32
PPS1 TR3220	96	155	57	38
PPS1 TR3225	102	155	57	46