

prevoS1 blow gun with composite nozzle



**Blowing force (at 6 bar
(g))**

286

**Dynamic pressure (at
10 mm at 6 bar (bar))**

2.5

**Air consumption (at 6
bar (Nm³/h))**

14

**Sound level (at 6 bar
(dBA))**

85

**Max operating
pressure**

12 bar

Temperature

-15°C to +70°C

Construction

Polyamide composite body

Highlight


Compact

Connection

Built-in adaptor

Description

Reference	Blowing force (at 6 bar (g))	Dynamic pressure (at 10 mm at 6 bar (bar))	Air consumption (at 6 bar (Nm ³ /h))	Sound level (at 6 bar (dBA))
UBG 06PRE	286	2.5	14	85

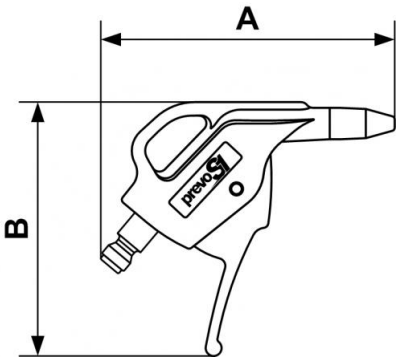

Dimensions		
Reference	A mm	B mm
UBG 06PRE	112	97