


DPF series - Industrial type - anti-static polyurethane hose - ATEX



<u>ID/OD (mm)</u> 10 x 14	<u>Length (m)</u> 12	<u>Coupler</u> ESI 07	<u>Flow rate (l/min)</u> 800
<u>Swivel inlet BSPP female thread</u> G 3/8	<u>Weight (kg)</u> 7	<u>Technology</u> Pipe locked with ratchet stop	<u>Max operating pressure</u> 12 bar
<u>Construction</u> Epoxy-coated steel case	<u>Connection</u> 1 m of inlet supply hose		

Description						
Reference	ID/OD (mm)	Length (m)	Coupler	Flow rate (l/min)	Swivel inlet BSPP female thread	Weight (kg)
DPFEX 1012ES	10 x 14	12	ESI 07	800	G 3/8	7

Reference	ID/OD (mm)	Length (m)	Coupler	Flow rate (l/min)	Swivel inlet BSPF female thread	Weight (kg)
DPFEX 1012IS	10 x 14	12	ISI 06	800	G 3/8	7
DPFEX 1012CS	10 x 14	12	CSI 06	800	G 3/8	7

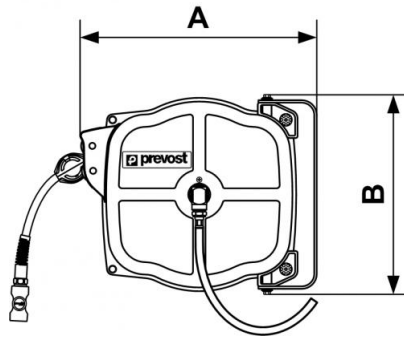

Dimensions

Reference	A mm	B mm
DPFEX 1012ES	377	317
DPFEX 1012IS	377	317
DPFEX 1012CS	377	317