


DPF series - Industrial type - anti-static polyurethane hose - ATEX



ID/OD (mm) 10 x 14	Length (m) 12	Coupler ESI 07	Flow rate (l/min) 800
Swivel inlet BSPP female thread G 3/8	Weight (kg) 7	Technology Pipe locked with ratchet stop	Max operating pressure 12 bar
Construction Epoxy-coated steel case	Connection 1 m of inlet supply hose		

Description						
Reference	ID/OD (mm)	Length (m)	Coupler	Flow rate (l/min)	Swivel inlet BSPP female thread	Weight (kg)
DPFEX 1012ES	10 x 14	12	ESI 07	800	G 3/8	7

Reference	ID/OD (mm)	Length (m)	Coupler	Flow rate (l/min)	Swivel inlet BSPF female thread	Weight (kg)
DPFEX 1012IS	10 x 14	12	ISI 06	800	G 3/8	7
DPFEX 1012CS	10 x 14	12	CSI 06	800	G 3/8	7

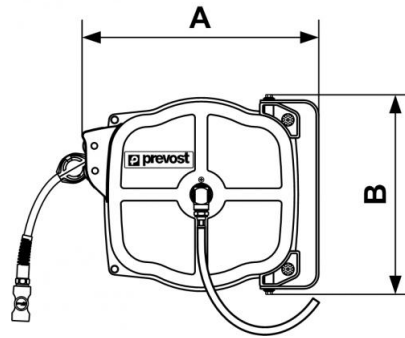

Dimensions

Reference	A mm	B mm
DPFEX 1012ES	377	317
DPFEX 1012IS	377	317
DPFEX 1012CS	377	317