


## Butterfly impact wrench



<p><b>Square driver</b></p> <p>1/4"</p>	<p><b>Max. unscrew torque (Nm)</b></p> <p>108</p>	<p><b>Consumption (l/min)</b></p> <p>59</p>	<p><b>Rotation speed (rpm)</b></p> <p>12000</p>
<p><b>BSPT female thread</b></p> <p>R 1/4</p>	<p><b>Sound level (dB(A))</b></p> <p>98</p>	<p><b>Weight (kg)</b></p> <p>0.53</p>	<p><b>Max operating pressure</b></p> <p>6,2 bar</p>
<p><b>Applications</b></p> <p>Fitting and removal of bolts and screws</p>	<p><b>Highlight</b></p> <p>Tightening capacity</p>	<p><b>Connection</b></p> <p>Supplied with 3 adaptors: ISO 6150 B; European 7,4 mm; ARO 210</p>	

Description							
Reference	Square driver	Max. unscrew torque (Nm)	Consumption (l/min)	Rotation speed (rpm)	BSPT female thread	Sound level (dB(A))	Weight (kg)
<b>TIW 14100</b>	1/4"	108	59	12000	R 1/4	98	0.53

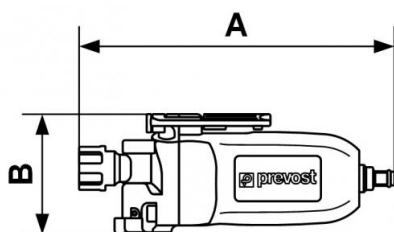

### Dimensions

Reference	A mm	B mm
<b>TIW 14100</b>	139	90