

## Parallel female thread coupler



### BSPP female thread

G 3/8

### Technology

"One push" safety system  
(avoids hose whip)

### Operating pressure

2 to 12 bar

### Flow rate at 6 bar

3686 l/min ( $\Delta P = 0,6$  bar)

### ID Passage

11 mm

### Temperature

-15°C to +70°C

### Construction


Polyamide composite body

### Highlight

Anti-static Excellent  
efficiency Non scratch

## Description

| Reference           | BSPP female thread |
|---------------------|--------------------|
| <b>ISI 111102EB</b> | G 3/8              |
| <b>ISI 111103EB</b> | G 1/2              |
| <b>ISI 111104EB</b> | G 3/4              |

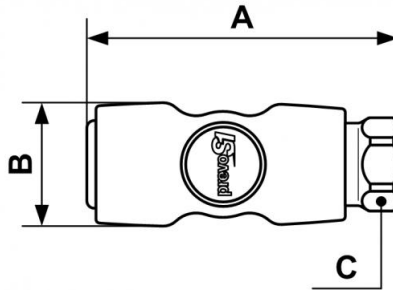

### Dimensions

| Reference           | A mm | B mm | C mm |
|---------------------|------|------|------|
| <b>ISI 111102EB</b> | 101  | 37   | 26   |
| <b>ISI 111103EB</b> | 102  | 37   | 26   |
| <b>ISI 111104EB</b> | 111  | 37   | 30   |