

Parallel female thread coupler



BSPP female thread

G 3/8

Technology

"One push" safety system
(avoids hose whip)

Operating pressure

2 to 12 bar

Flow rate at 6 bar

3686 l/min ($\Delta P = 0,6$ bar)

ID Passage

11 mm

Temperature

-15°C to +70°C

Construction


Polyamide composite body

Highlight

Anti-static Excellent
efficiency Non scratch

Description

Reference	BSPP female thread
ISI 111102EB	G 3/8
ISI 111103EB	G 1/2
ISI 111104EB	G 3/4

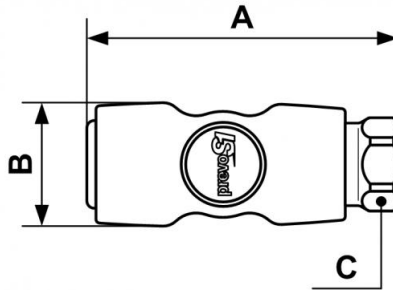

Dimensions

Reference	A mm	B mm	C mm
ISI 111102EB	101	37	26
ISI 111103EB	102	37	26
ISI 111104EB	111	37	30