

Parallel male thread coupler



BSPM male thread

G 3/8

Technology

"One push" safety system
(avoids hose whip)

Operating pressure

2 to 12 bar

Flow rate at 6 bar

3686 l/min ($\Delta P = 0,6$ bar)

ID Passage

11 mm

Temperature

-15°C to +70°C


Construction

Polyamide composite body

Highlight

Anti-static Excellent
efficiency Non scratch

Description	
Reference	BSPB male thread
ISI 111152EB	G 3/8
ISI 111153EB	G 1/2
ISI 111154EB	G 3/4

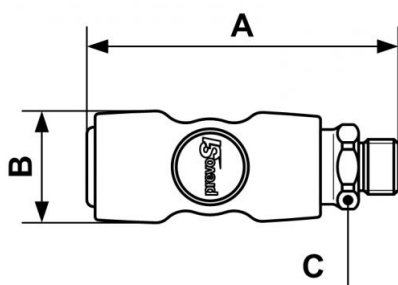

Dimensions

Reference	A mm	B mm	C mm
ISI 11152EB	108	37	26
ISI 11153EB	110	37	26
ISI 11154EB	114	37	32